


# DUPLEX PACKING FILLER AF-5K II



**0.25-5 kg**

Weighing range

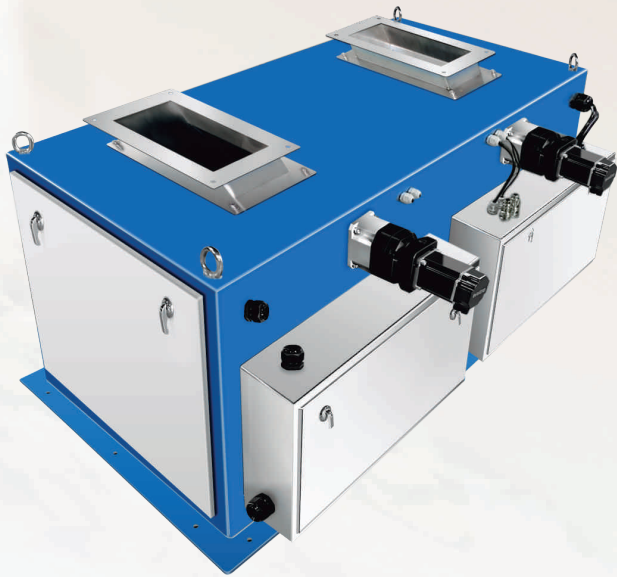

Stable  
Performance



Easy  
Installation

**± 2 g**

Best accuracy



Servo Motor  
Control



Weighing  
Accurate

**≥ 1600** + Pcs/h

Speed

## Features:

- **Granular material:** design for rice, millet, beans and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Weighing accurate:** weighing range is 0.25-5kg. Speed can reach 2800 pcs/h when the fast algorithm is opened, and best accuracy  $\pm 10g$ .



## Specification

Model	PaxGO AF-5KII
Weighing range	0.25~5Kg
Division	1g
Best Accuracy*	±2g
Speed*	≥1600 pcs/h(Enable fast algorithm:2800 pcs/h)
Volume	11L x 2
Feeding method	Servo motor+feeding vibrator , pneumatic discharging
Material	SS304,carbon steel
I/O	8 output(5V),8 input(24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V ±10%,50/60HZ,500KW
Working environment	0~40°C , 90%R.H condensation is not allowed

\*Testing material: rice,speed:1600pcs/h,accuracy: ±2 g

\*Normally, the diameter of the testing material 1-5mm

## Structure & Dimension

Unit: mm

