


DUPLEX PACKING FILLER AF-25KII

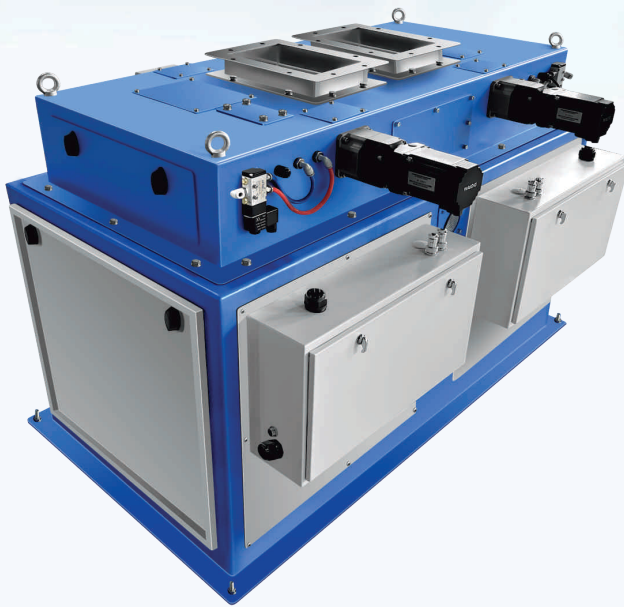

5-25kg
Weighing range

± 10g
Best accuracy

≥ 1600 + Pcs/h
Speed



Stable
Performance



Easy
Installation



Servo Motor
Control



Weighing
Accurate

Features:

- **Granular material:** design for plastic particle, granular fertilizer, feeds and other granular material.
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Weighing accurate:** weighing range is 5-25kg. Speed can reach 2400 pcs/h when the fast algorithm is opened, and best accuracy $\pm 10g$.



Optional:



Bag Clamp

- SS304 stainless steel.



10-inch touch screen

- User-friendly interface design, vivid display, easy to operate.

Specification

Model	PaxGO AF-25K II
Weighing range	5~25Kg
Division	1g
Best Accuracy*	±10g
Speed*	≥1600pcs/h(Enable fast algorithm:2400 pcs/h)
Volume	55L x 2
Feeding method	Feeding control by servo, pneumatic discharging
Material	SS304,carbon steel
I/O	8 output(5V),8 input(24V)
Communication	RS485,Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V ±10%,50/60HZ,1KW
Working environment	0~40°C, 90%R.H condensation is not allowed

*Normally, the diameter of the testing material 1-5mm.

Structure & Dimension Unit: mm

