


DUPLEX PACKING FILLER AF-5KII



0.25-5kg
Weighing range

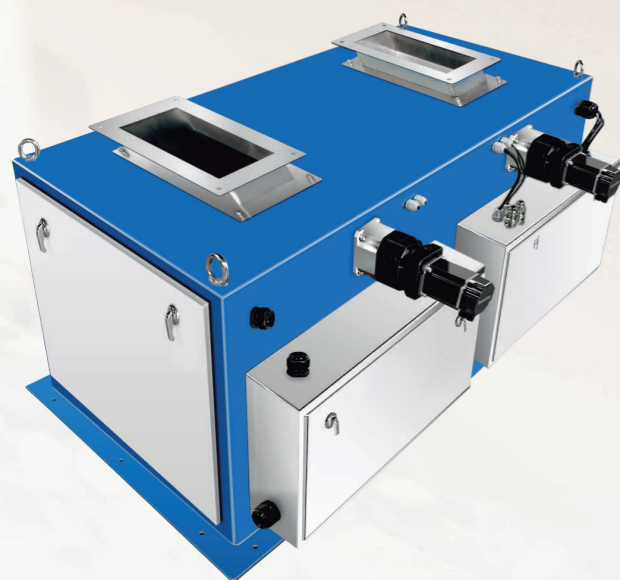

Stable
Performance



Easy
Installation

±2g
Best accuracy



Servo Motor
Control




Weighing
Accurate

2800 Pcs/h
Top speed

Features:

- **Granular material:** design for rice, millet, beans and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 0.25-5kg. Speed can reach 2800 pcs/h , and best accuracy ± 2g.



Specification

Model	PaxGO AF-5KII
Weighing range	0.25~5Kg
Division	1g
Best Accuracy*	±2g
Top speed*	2800 pcs/h
Volume	12L x 2
Feeding method	Servo motor+feeding vibrator , pneumatic discharging
Material	SS304,carbon steel
I/O	8 output(5V),8 input(24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V ±10%,50/60HZ,500KW
Working environment	0~40°C , 90%R.H condensation is not allowed

*Speed and accuracy depend on the density and flow rate of the materials.

Structure & Dimension

Unit: mm

