


DUPLEX PACKING FILLER AF-50K II

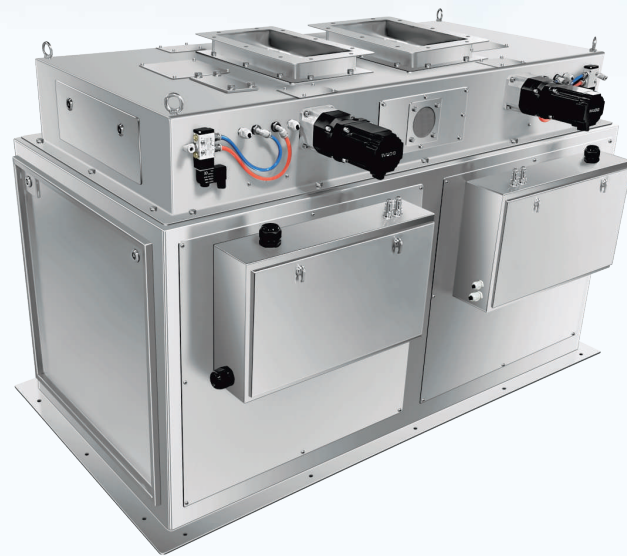

10-50kg
Weighing range

±20g
Best accuracy

≥1500 + Pcs/h
Speed



Stable Performance



Easy Installation



Servo Motor Control



Weighing Accurate

Features:

- **Granular material:** design for packing plastic particles, rice, sugar and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 10-50kg. Speed can reach 1800 pcs/h when the fast algorithm is opened, and best accuracy ± 20g.

Optional:



10-inch touch screen

User-friendly interface design, vivid display, easy to operate.



Specification

Model	PaxGO AF-50K II
Weighing range	10~50Kg
Division	1g
Best Accuracy*	±20g
Speed*	≥1500pcs/h(Enable fast algorithm:1800 pcs/h)
Volume	86L x 2
Feeding method	Feeding control by servo, pneumatic discharging
Material	SS304,carbon steel
I/O	8 output(5V),8 input(24V)
Communication	RS485,Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V ±10%,50/60HZ,1KW
Working environment	0~40°C, 90%R.H condensation is not allowed

*Normally, the diameter of the testing material 1-5mm.

Structure & Dimension

Unit: mm

